

CLL5221B THRU CLL5267B

**SURFACE MOUNT SILICON
ZENER DIODES
500mW, 2.4 THRU 75 VOLT**



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL5221B series silicon Zener diodes are highly reliable voltage regulators designed for use in industrial, commercial, entertainment, and computer applications.

MARKING: CATHODE BAND



SOD-80 CASE

MAXIMUM RATINGS:

Power Dissipation ($T_A=50^\circ\text{C}$)
 Operating and Storage Temperature
 V_Z Tolerance: Part number with Tolerance "B"
 V_Z Tolerance: Part number with Tolerance "C"
 V_Z Tolerance: Part number with Tolerance "D"

SYMBOL

P_D 500
 T_J, T_{stg} -65 to +200
 V_Z Tolerance: Part number with Tolerance "B" ± 5
 V_Z Tolerance: Part number with Tolerance "C" ± 2
 V_Z Tolerance: Part number with Tolerance "D" ± 1

UNIT

mW
 $^\circ\text{C}$
 %
 %
 %

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$) $V_F=1.25\text{V MAX @ } I_F=200\text{mA}$ (for all types)

| TYPE | ZENER VOLTAGE $V_Z @ I_{ZT}$ | | | TEST CURRENT I_{ZT} | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT θV_Z |
|----------|---------------------------------|-----|-------|--------------------------|-------------------------|-------------------|-------------|-------------------------|-----|---|
| | MIN | NOM | MAX | | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | | | |
| | V | V | V | | mA | Ω | Ω | μA | V | |
| CLL5221B | 2.280 | 2.4 | 2.520 | 20 | 30 | 1200 | 0.25 | 100 | 1.0 | -0.085 |
| CLL5222B | 2.375 | 2.5 | 2.625 | 20 | 30 | 1250 | 0.25 | 100 | 1.0 | -0.085 |
| CLL5223B | 2.565 | 2.7 | 2.835 | 20 | 30 | 1300 | 0.25 | 75 | 1.0 | -0.080 |
| CLL5224B | 2.660 | 2.8 | 2.940 | 20 | 30 | 1400 | 0.25 | 75 | 1.0 | -0.080 |
| CLL5225B | 2.850 | 3.0 | 3.150 | 20 | 29 | 1600 | 0.25 | 50 | 1.0 | -0.075 |
| CLL5226B | 3.135 | 3.3 | 3.465 | 20 | 28 | 1600 | 0.25 | 25 | 1.0 | -0.070 |
| CLL5227B | 3.420 | 3.6 | 3.780 | 20 | 24 | 1700 | 0.25 | 15 | 1.0 | -0.065 |
| CLL5228B | 3.705 | 3.9 | 4.095 | 20 | 23 | 1900 | 0.25 | 10 | 1.0 | -0.060 |
| CLL5229B | 4.085 | 4.3 | 4.515 | 20 | 22 | 2000 | 0.25 | 5.0 | 1.0 | ± 0.055 |
| CLL5230B | 4.465 | 4.7 | 4.935 | 20 | 19 | 1900 | 0.25 | 5.0 | 2.0 | ± 0.030 |
| CLL5231B | 4.845 | 5.1 | 5.355 | 20 | 17 | 1600 | 0.25 | 5.0 | 2.0 | ± 0.030 |
| CLL5232B | 5.320 | 5.6 | 5.880 | 20 | 11 | 1600 | 0.25 | 5.0 | 3.0 | +0.038 |
| CLL5233B | 5.700 | 6.0 | 6.300 | 20 | 7.0 | 1600 | 0.25 | 5.0 | 3.5 | +0.038 |
| CLL5234B | 5.890 | 6.2 | 6.510 | 20 | 7.0 | 1000 | 0.25 | 5.0 | 4.0 | +0.045 |
| CLL5235B | 6.460 | 6.8 | 7.140 | 20 | 5.0 | 750 | 0.25 | 3.0 | 5.0 | +0.050 |
| CLL5236B | 7.125 | 7.5 | 7.875 | 20 | 6.0 | 500 | 0.25 | 3.0 | 6.0 | +0.058 |
| CLL5237B | 7.790 | 8.2 | 8.610 | 20 | 8.0 | 500 | 0.25 | 3.0 | 6.5 | +0.062 |
| CLL5238B | 8.265 | 8.7 | 9.135 | 20 | 8.0 | 600 | 0.25 | 3.0 | 6.5 | +0.065 |
| CLL5239B | 8.645 | 9.1 | 9.555 | 20 | 10 | 600 | 0.25 | 3.0 | 7.0 | +0.068 |
| CLL5240B | 9.500 | 10 | 10.50 | 20 | 17 | 600 | 0.25 | 3.0 | 8.0 | +0.075 |
| CLL5241B | 10.45 | 11 | 11.55 | 20 | 22 | 600 | 0.25 | 2.0 | 8.4 | +0.076 |
| CLL5242B | 11.40 | 12 | 12.60 | 20 | 30 | 600 | 0.25 | 1.0 | 9.1 | +0.077 |
| CLL5243B | 12.35 | 13 | 13.65 | 9.5 | 13 | 600 | 0.25 | 0.5 | 9.9 | +0.079 |
| CLL5244B | 13.30 | 14 | 14.70 | 9.0 | 15 | 600 | 0.25 | 0.1 | 10 | +0.082 |
| CLL5245B | 14.25 | 15 | 15.75 | 8.5 | 16 | 600 | 0.25 | 0.1 | 11 | +0.082 |

CLL5221B THRU CLL5267B


SURFACE MOUNT SILICON
ZENER DIODES
500mW, 2.4 THRU 75 VOLT



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$) $V_F=1.25\text{V MAX @ } I_F=200\text{mA}$ (for all types)

| TYPE | ZENER VOLTAGE $V_Z @ I_{ZT}$ | | | TEST CURRENT | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT |
|----------|---------------------------------|-----|-------|--------------|-------------------------|-------------------|---------------|-------------------------|------|---|
| | MIN | NOM | MAX | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | | | θV_Z |
| | V | V | V | mA | Ω | Ω | μA | V | %/°C | |
| CLL5246B | 15.20 | 16 | 16.80 | 7.8 | 17 | 600 | 0.25 | 0.1 | 12 | +0.083 |
| CLL5247B | 16.15 | 17 | 17.85 | 7.4 | 19 | 600 | 0.25 | 0.1 | 13 | +0.084 |
| CLL5248B | 17.10 | 18 | 18.90 | 7.0 | 21 | 600 | 0.25 | 0.1 | 14 | +0.085 |
| CLL5249B | 18.05 | 19 | 19.95 | 6.6 | 23 | 600 | 0.25 | 0.1 | 14 | +0.086 |
| CLL5250B | 19.00 | 20 | 21.00 | 6.2 | 25 | 600 | 0.25 | 0.1 | 15 | +0.086 |
| CLL5251B | 20.90 | 22 | 23.10 | 5.6 | 29 | 600 | 0.25 | 0.1 | 17 | +0.087 |
| CLL5252B | 22.80 | 24 | 25.20 | 5.2 | 33 | 600 | 0.25 | 0.1 | 18 | +0.088 |
| CLL5253B | 23.75 | 25 | 26.25 | 5.0 | 35 | 600 | 0.25 | 0.1 | 19 | +0.089 |
| CLL5254B | 25.65 | 27 | 28.35 | 4.6 | 41 | 600 | 0.25 | 0.1 | 21 | +0.090 |
| CLL5255B | 26.60 | 28 | 29.40 | 4.5 | 44 | 600 | 0.25 | 0.1 | 21 | +0.091 |
| CLL5256B | 28.50 | 30 | 31.50 | 4.2 | 49 | 600 | 0.25 | 0.1 | 23 | +0.091 |
| CLL5257B | 31.35 | 33 | 34.65 | 3.8 | 58 | 700 | 0.25 | 0.1 | 25 | +0.092 |
| CLL5258B | 34.20 | 36 | 37.80 | 3.4 | 70 | 700 | 0.25 | 0.1 | 27 | +0.093 |
| CLL5259B | 37.05 | 39 | 40.95 | 3.2 | 80 | 800 | 0.25 | 0.1 | 30 | +0.094 |
| CLL5260B | 40.85 | 43 | 45.15 | 3.0 | 93 | 900 | 0.25 | 0.1 | 33 | +0.095 |
| CLL5261B | 44.65 | 47 | 49.35 | 2.7 | 105 | 100 | 0.25 | 0.1 | 36 | +0.095 |
| CLL5262B | 48.45 | 51 | 53.55 | 2.5 | 125 | 1100 | 0.25 | 0.1 | 39 | +0.096 |
| CLL5263B | 53.20 | 56 | 58.80 | 2.2 | 150 | 1300 | 0.25 | 0.1 | 43 | +0.096 |
| CLL5264B | 57.00 | 60 | 63.00 | 2.1 | 170 | 1400 | 0.25 | 0.1 | 46 | +0.097 |
| CLL5265B | 58.90 | 62 | 65.10 | 2.0 | 185 | 1400 | 0.25 | 0.1 | 47 | +0.097 |
| CLL5266B | 64.60 | 68 | 71.40 | 1.8 | 230 | 1600 | 0.25 | 0.1 | 52 | +0.097 |
| CLL5267B | 71.25 | 75 | 78.75 | 1.7 | 270 | 1700 | 0.25 | 0.1 | 56 | +0.098 |

SOD-80 CASE - MECHANICAL OUTLINE

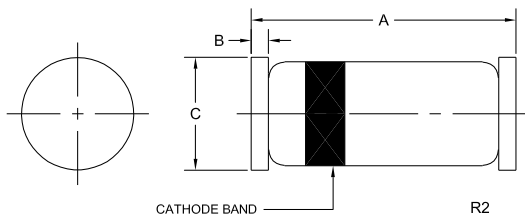

| DIMENSIONS | | | | |
|------------|--------|-------|-------------|------|
| SYMBOL | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.130 | 0.146 | 3.30 | 3.71 |
| B | 0.014 | | 0.35 | |
| C (DIA) | 0.049 | 0.067 | 1.25 | 1.70 |

SOD-80 (REV:R2)

MARKING: CATHODE BAND

R7 (9-September 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms